arXiv:quant-ph/0512090v1 12 Dec 2005

Quantum "Pathfinder"
(Extended Abstract)

Alexander Yu. Vlasov

Abstract

It is discussed an opportunity to introduce new class of quantum algorithms based on possibility to express amplitude of transition between two states of quantum system as sum of some function along all possible classical paths. Continuous analogue of the property with integral on all possible paths is well known due to Feynman approach and ensures the correspondence with classical minimal action principle. It is less technical and rather popular introduction to earlier work about application of Lagrangian methods in quantum computing [1].

* * *

Alice: *Our main task — is practical realization of a general purpose quantum computer.*

Bob: *I have got one,* PQ1 *64Qb* $\sqrt{2}$*GHZ. And so?*

Alice: *Excellent! Try Shor's factoring algorithm.*

Bob: *I am trying:* $55 = 7 \times 9\frac{1}{7}$? ... $8 \times 6\frac{7}{8}$?

(Quantum Communications, February 1, 2008)

Lack of algorithms is certain problem of quantum information science. Possibly, famous Shor's factoring algorithm would be enough, but even if we would have general purpose quantum computer with hundreds qubits, overcome decoherence, *etc.,* it still may fail with decomposition of number 55 simply because some quantum phase gate instead of $e^{32i\phi}$ is doing $e^{31.9i\phi}$.

Formally, it may be anyway general purpose quantum computer, because there is implemented universal set of quantum gates; in principle the system may perform arbitrary unitary operator in exponentially big Hilbert space and be quite appropriate for wide variety of tasks like simulation of quantum system or realization currently unknown quantum algorithms.

The problem discussed above is simply usual declaration about difficulty to realize some "pure digital" tasks on analogue element. The quantum computer is using methods both discrete and analogue processing and it is useful to find good balance.

Class of NP-complete tasks is even more powerful than Shor's factoring algorithm. Well known example, *traveling salesman problem* (TSP), looks "more physicaslly," because it is a task about finding shorter paths. Really one of earliest paper about quantum algorithm was devoted just the TSP [2]. It should

be mentioned, that problem of finding *minimal* path in graph [2] really even beyond scope of NP-complete problems [3], because formally it differs from initial TSP, *i.e.* about finding a path *shorter than given length*.

Unfortunately, the solution [2] need for exponential number of particles, but the problem of minimal path anyway devote attention, due to very natural bond between physical and combinatorial tasks displayed in such kind of problems. There is well known and quite popular explanation by Feynman [4], why laws of quantum mechanics cause photon to travel between two points by shortest possible way[1] in agreement with classical minimal action principle.

However, search for new quantum algorithms of such a kind have been failing, C. Bennett wrote in [5]

> "No fast quantum algorithms have been found for other famous search or optimization problems, such as the traveling salesman problem and the large class (called NP-complete) of problems equivalent to it. These problems, like the naive approach to factoring, can be cast as searches for a successful solution among exponentially many candidates; but unlike factoring, no way is known of transition them into problems with a periodic structure amenable to detection by quantum interference."

In the Feynman's approach the photon just travelling along all possible classical paths, and due to oscillating term $\exp(\frac{i}{\hbar}\mathcal{A})$ only trajectories near extremum of action function $\mathcal{A}$ survive. The Bennett's formulation above looks very close to the principle. Why does not try to use the sums along all paths for some quantum optimization algorithm?

Rigorously, we should not expect precisely solution of TSP-like problems for any initial data using the method — there is *diffraction* phenomenon, *i.e.,* if irregularities of media are comparable with period of spatial oscillations (wave length), instead of one trajectory we may have some periodic angular scaterring. But even such phenomenon may be useful, say Simon and Shor quantum algorithms in such picture may be compared with finding step of *diffraction grating* by spectral decomposition of falling white light (or X-ray analysis of crystals).

Anyway such phenomenon devotes applications or research in area of quantum information science. One obvious difficulty — is usage finite dimensional spaces in theory of quantum computing. This difficulty was partially overcome in [1], there was shown, that most methods used in continuous theory may be rewritten for finite-dimensional discrete case using quite straightforward ideas.

The second problem is misconceptions due to formal difficulty with situating the task in classification of quantum algorithms. Say, it was proven in [6], that

> "...that relative to an oracle chosen uniformly at random, with probability 1, the class **NP** cannot be solved on a quantum Turing machine in time $o(2^{n/2})$. We also show that relative to a permutation oracle chosen uniformly at random, with probability 1, the class **NP** $\cap$ **co–NP** cannot be solved on a quantum Turing machine in time $o(2^{n/3})$."

[1] Even in nonhomogeneous media, including discontinuous case like refraction on boundary of air and water.

Is $\sqrt{N}$ speedup like in Grover algorithm the best possible result? It is not quite so — in the same paper [6], we can read

> "What is the relevance of these oracle results? We should emphasize that they do not rule out the possibility that **NP** $\subseteq$ **BQP**. What these results do establish is that there is no black-box approach to solving **NP**-complete problems by using some uniquely quantum-mechanical features of QTMs."

The failure with NP-complete problems is some attribute of unitary quantum evolution, for example even small nonlinearity may help resolve such problems [7]. Really it is even possible to use some linear, but nonunitary physical models, let us consider for example evolution described by diagonal matrix with all units, except of one element $1 + \epsilon$.

The model with path sums uses unitary quantum evolution. Why does it produce fast search, if to take into account pessimistic experience mentioned above? First observation is that every day we can see light travelling just along minimal paths. This argument may be disputed using already mentioned example with diffraction: such path optimization "algorithm" uses special structure of initial data, but not general one suggested in NP-complete tasks, for example it is smooth density for finding shortest path, or periodic structures for period finding discussed earlier.

Even with such limitations algorithm devotes attention, but there is yet another argument. We may always choose period of oscillations small enough, to resolve "diffraction problem" for given task. Furthermore, even with diffraction such a quantum algorithm anyway would "perform summation" along all paths and classical computer need exponential time for such a task with exponential number of trajectories or even infinite one, if we consider "smooth path limit" $\Delta t \to 0$, then sums produce famous functional integral.

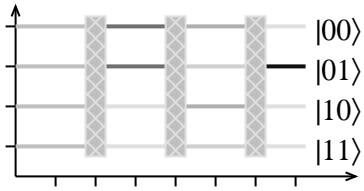

Figure 1: Quantum parallelism

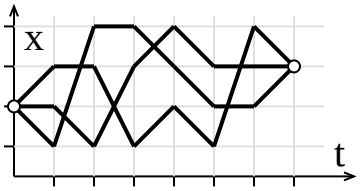

Figure 2: Feynman's paths

It is necessary to emphasize, that Feynman path integral (sum) model has certain difference with simpler Deutsch' quantum parallelism idea [8] initially inspired by Many-Worlds Interpretation of quantum mechanics. On Figures 1 and 2 depicted formal difference between quantum parallelism and paths sum paradigm. This rather simple, but unexpected fact may be realized by direct analysis of Lagrangian model described in [1], but using rather rough sketch of

idea, it may be compared with complexity of multiplication of arbitrary large (infinite in continuous limit) number of giant matrices in Heisenberg picture of path model and parallel processing with huge number of amplitudes in Schrödinger picture of quantum parallelism model. In path model data is "encoded" in operator (matrix) and in Deutsch' approach — in state (vector).

In quantum mechanics of system with infinite-dimensional Hilbert spaces the correspondence between operators and classical function is just subject of *quantization procedure*. For example classical Hamiltonian of harmonic oscillator

$$H(p,q) = p^2 + q^2 \tag{1}$$

corresponds to operator

$$\hat{H} = \hat{q}^2 + \hat{p}^2 = x^2 - \frac{\partial^2}{\partial x^2}, \quad \hat{H}\colon \psi(x) \mapsto x^2\psi(x) - \psi''(x). \tag{2}$$

How to suggest similar analogue for discrete system? Operators here is simply matrices, but that particular matrix can be associated with some classical function of p and q? It is possible and discussed in [1].

A classical function $H(p,q)$ after such quantization procedure corresponds to some Hamiltonian, *e.g.* for finite-dimensional Hilbert space with dimension D, it is $D \times D$ Herimtian matrix $\hat{H}$

$$\boldsymbol{\mathcal{Q}}(\text{quantization}): \quad H(p,q) \longleftrightarrow \hat{H}. \tag{3}$$

Evolution of quantum system is described by unitary matrix

$$\hat{U}(T) = e^{-i\hat{H}T}. \tag{4}$$

On the other hand, amplitude of transition between states $|k\rangle$ and $|j\rangle$

$$\langle k|\hat{U}(T)|j\rangle = \hat{U}_{jk} \tag{5}$$

may be expressed using sum on all paths with exponent of some expression resembling *action* in Hamiltonian mechanics with *classical function* $H(p,q)$ [1]. It is the more precise, the more fine division of time interval

$$\Delta t = T/N, \quad U = \left(e^{-i\hat{H}\Delta t}\right)^N. \tag{6}$$

It is clear, a model with quantum oracles and Turing machines may be not quite relevant for present discussion, and it is not clear, if the path integral may really resolve some NP-complete, exponential or even undecidable problems[2] in theory of algorithms, or would be useful only for simulation of quantum systems.

[2]Problems that may not be resolved by classical Turing machine in finite time, like *Turing Machine Halting Problem, Words Problem, Tiling Problem* [9], *etc.*

References

[1] A. Yu. Vlasov, "Towards Lagrangian approach to quantum computations," `quant-ph/0308017`.

[2] V. Černý, "Quantum computers and intractable (NP-complete) computing problems," *Phys. Rev. A* **48**, 116–119 (1993).

[3] J.-L. Laurière, *Intelligence artificielle*, (Eyrolles, Paris 1987).

[4] R. P. Feynman, *QED — the strange theory of light and matter*, (Princeton University Press, 1985).

[5] C. H. Bennett, "Quantum information and computation," *Phys. Today* **48**, 24–30 (1995).

[6] C. H. Bennett, E. Bernstein, G. Brassard, and U. Vazirani, "Strengths and weaknesses of quantum computing," *SIAM J. Comput.* **26**, 1510–1523 (1997); `quant-ph/9701001.`

[7] D. S. Abrams and S. Lloyd, "Nonlinear quantum mechanics implies polynomial-time solution for NP-complete and $\#P$ problems," *Phys. Rev. Lett.* **81**, 3992–3995 (1998); `quant-ph/9801041`.

[8] D. Deutsch, "Quantum theory, the Church-Turing principle and the universal quantum computer," *Proc. R. Soc. London Ser.* **A 400**, 97–117 (1985).

[9] R. Penrose, *The emperor's new mind*, (Oxford University Press, 1989)